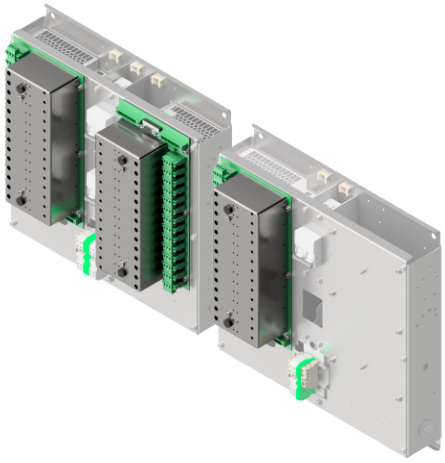


30 channel NLC core

500-100 30/CORE NLC

30 channel NLC core
Each channel has one ABS/LR type approved Lopolight LMR/Q monitoring relay
The LMR/Q monitors for function, end-of-life and with a current limiter (2A)
Each channel monitors one logical light:
1 channel for single lts, 2 channels for dbl lts
Incl. Motherboard with alu cover.

Specifications	
Number	500-100 30/CORE NLC
Certification	This Navigation Light is certified by DNV, the Declaration of conformity and the certificates can be found on www.lopolight.com under Support
Approved to	IEC 60945
EAN	5704438022935
UPC Code	879343023065
Current consumption (mA @ 12VDC)	0
Current consumption (mA @ 24VDC)	0
Weight (Kg)	0 Kg
Weight (Oz)	0.00 Oz