

LNFT WR Series

Double Circuit LED Neon Flex White- and Red

LED Neon Flex is high light output, UV resistant, saltwater resistant, high temperature resistant, direct- or indirect LED neon flex strip. Due to the possibility to cut every 35mm and the two separate circuits there are many possibilities with this high-quality product. Standard supplied with U profile bracket for the complete length.

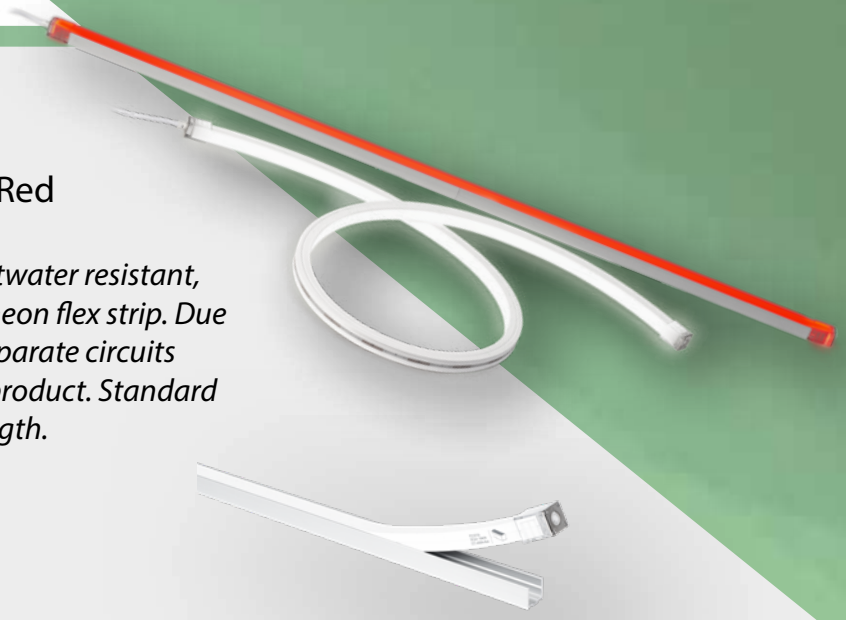

Dimensions

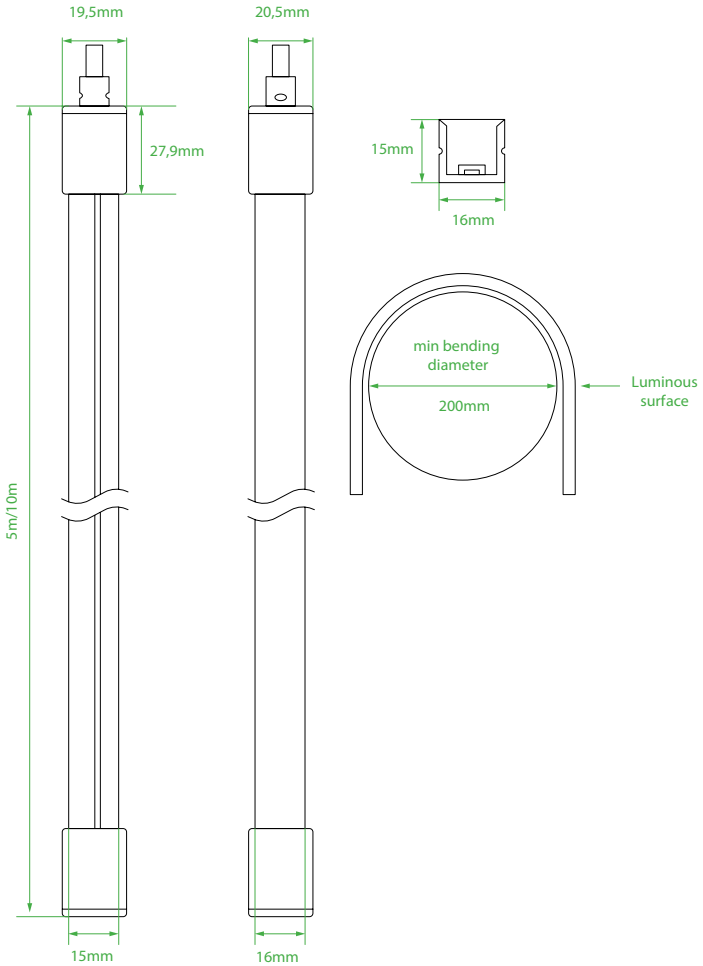

Technical Information

Material:	Environmental protected silicone
Lens:	140°
IP Rating:	IP67
Light Source:	5Watt per meter per circuit
	100Lumens per Watt
	Natural White 3.900K & Red
	CRI > 90
Power Source:	Stabilized 24Vdc (Voltage stabilizer available on request)
Ambient Temperature:	Operating temperature -30°C ~ +55°
Cut:	Every 50mm
Max length:	5mtr
Mounting:	Surface Mount with aluminium U-shaped profile

Compliances

ETL certified, UL listed, RoHS
In compliance with rules of maritime classification societies, additional VDE and IEC 60092-306.
(Equipment luminaires and lighting accessories for use on vessels)

E-LED Lighting BV & Inc.
European Office: Tel: +31 (0)346 28 62 62, E-mail Info@E-LEDLighting.com
United States Office: Tel: +1 (561) 776-1702, E-mail Info@E-LEDLighting.com