




EcoPack 5pcs LED FIL Safe G45 B22d 2W (19W) 180lm 827 PC Clear

Article number: 144083

BAI EcoPack 5pcs LED Filament Safe Ball G45 B22d 2W 2700K Clear 180lm (19W) 230V-240V 320° 45x70mm P45 IP44 Shatterproof Polycarbonate Party LED-lamp

The LED filament Safe series responds to the desire to also use the decorative filament bulbs where shards are extremely undesirable when broken. Think of professional (open) kitchens, above tables in a restaurant, above the food department in and on the market. The bulb is made of polycarbonate which is much stronger than the traditional glass shade and also does not splinter. This also makes the lamp ideal for use in Bailey Light Strings at (temporary) festivals or events. When mounted hanging in combination with a suitable lamp holder (holder makes a watertight seal with the bulb) also outdoors applicable. We advise to use this lamp in combination with the Bailey Light String of 10m. The party bulbs are standard in an environmentally friendly EcoPack packaging of 5 pieces, which means less waste and handling. Moreover, this lamp is durable and energy efficient.

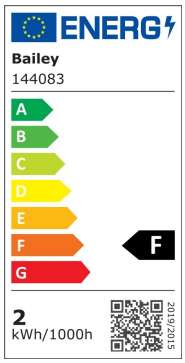

General ETIM properties

ETIM group	Lamps
ETIM class	LED-lamp/Multi-LED
Name	EcoPack 5pcs LED FIL Safe G45 B22d 2W (19W) 180lm 827 PC Clear
Brand	Bailey
Productseries	LED Filament safe
Producttype	G45 EcoPack

All rights reserved. We reserve the right to change designs and technical specifications of our products.s

EcoPack 5pcs LED FIL Safe G45 B22d 2W (19W) 180lm 827 PC Clear

Article number: 144083


ETIM specifications


Socket	B22d
Luminous flux [lm]	180 - 180
Nominal voltage [V]	220 - 240
Lamp power [W]	2 - 2
Colour temperature [K]	2700 - 2700
Diameter [mm]	45
Length [mm]	70
Dimmable	No
Lamp shape	Round/globe
Beam angle [°]	320 - 320
Colour	White
Type of glass/cover	Clear
Lamp designation	P45
Colour rendering index CRI	80-89
Voltage type	AC
Filament lamp	Yes
Rated luminous flux according to IEC 62612 [lm]	180
Power factor	0.5
Lamp efficacy [lm/W]	90
Nominal current [mA]	15 - 15
Colour of light according to EN 12464-1	Warm white < 3300 K
Housing colour	Colourless
Average nominal lifetime [h]	10000
Degree of protection (IP)	IP20
Colour consistency (McAdam ellipse)	SDCM6
Min. number of switching cycles	7500
Weighted energy consumption in 1000 hours [kWh]	2
Remote operation possible	No
With movement sensor	No
With remote control	No
Photobiological safety according to EN 62471	Other
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No
IFTTT support available	No
Suitable for electronic ballast	No
Suitable for magnetic ballast	No
Dimming phase cut-off (trailing edge)	No
Dimming phase cut-on (leading edge)	No
Dimming Touch and Dim	No
Dimming Zigbee	No

All rights reserved. We reserve the right to change designs and technical specifications of our products.s

Dimming Bluetooth	No
Dimming Wi-Fi	No
Energy efficiency class according to EU regulation 2019/2015	No
With twilight switch	No
Material of light bulb	Plastic

Complementary articles





141375

Light String 10M 10x B22d IP44

All rights reserved. We reserve the right to change designs and technical specifications of our products.s