
4010-2x16-230-4-CC-E01

LED multi-purpose luminaire 4010 for emergency power central supply





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

WISKA-Order no.	10112944
Type	4010-2x16-230-4-CC-E01
Material	Polycarbonate
Material globe/diffuser	Polycarbonate
Globe colour	Opal
Wattage	32 W
Power^	2 x 16 W
Voltage	230 V
Voltage emergency light	24 V
Type of Voltage	AC
Frequence	50/60 Hz
Protection class	IP66 / IP67
Operational areas	Indoor / Outdoor
Temp. range min	-25 °C
Temp. range max	50 °C
Impact resistance	IK10
Lightsource	LED
Lightsource incl.	Yes
Colour temperature	4000 K
Luminous flux	4800 lm
Rated Lifetime	L70/B10 @Ta +45 °C
System Lifetime	100000 h
Type of cable gland	M 25 x 1,5
Ø cable diameter min	9 mm
Ø cable diameter max	17 mm

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

External dimensions LxWxH	868x185x78mm
Weight	2,5 kg
Colour	Black
Mounting	Ceiling, Wall, Surface mounting


Remarks:

LED multi-purpose luminaire 4010
IP66/67
220/230V 50/60Hz
2x16W LED, 4000K
4x cable glands ESKV 25
for cable Ø 9-17mm
battery backup 24V DC
for central battery supply
with 5W and 500lm

17.12.2024

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

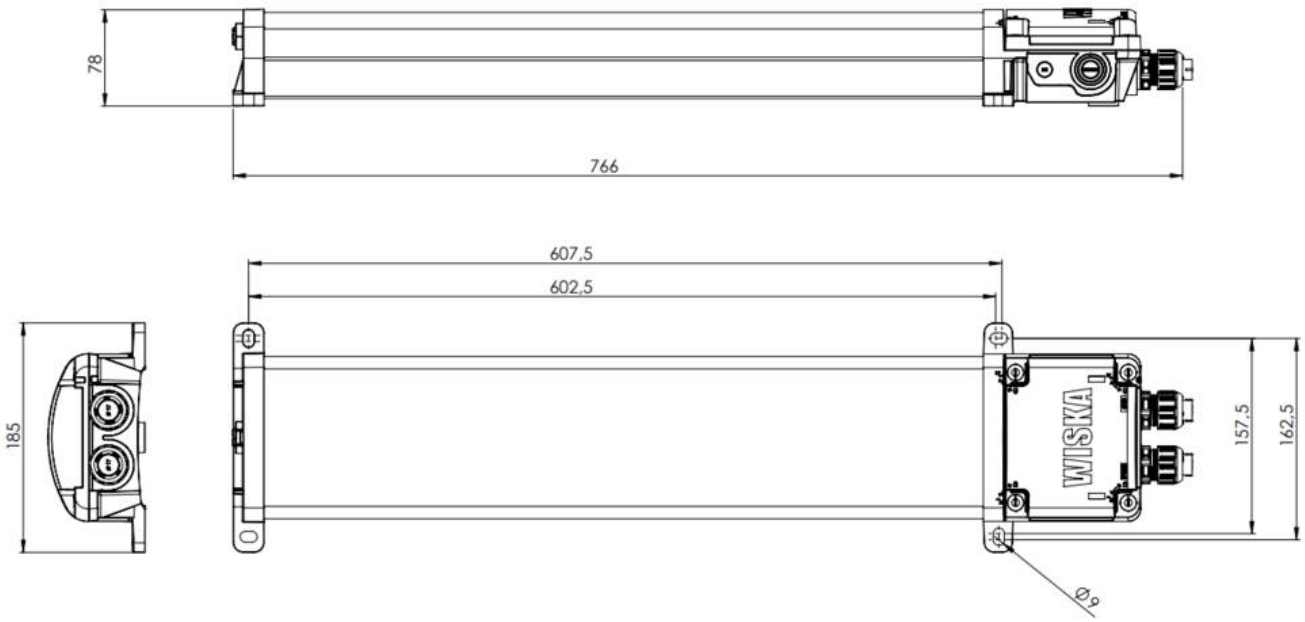

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice