# GM 30

Locknut, brass according to DIN 89280, M30






Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

RoHS

| | |
|---|---|
| **Material** | Brass |
| **Temp. range min** | -150 °C |
| **Temp. range max** | 250 °C |
| **Thread type** | M |
| **Ø Connection thread D** | 30 |
| **Lead** | 2 |
| **Key width SW** | 36 mm |
| **Collar diameter (E)** | 42 mm |
| **Total length TL** | 6 mm |
| **Surface** | Bright |
| **Order no. bright** | 50011421 |
| **Type** | GM 30 |
| **Packing unit** | 1 |
| **ETIM-Classification** | EC000940 |

28.10.2025

Your Contact:
**WISKA Hoppmann GmbH**
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com



Other technical data on request / subject to change without notice

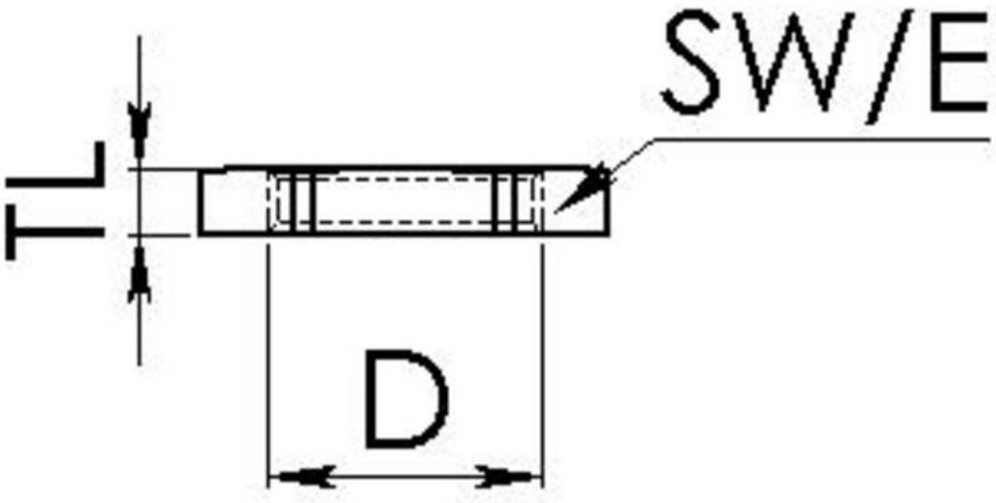


Your Contact:
**WISKA Hoppmann GmbH**
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com



Other technical data on request / subject to change without notice