

EXLLL Series - Ex. Atex LED Linear Light 30Watt 3.300Lumens


Ex. Atex certified LED linear lights for replacing TL fluorescent fixtures for various interior- and exterior applications such as stores, technical areas, decks etc.

Ex db eb mb IIC T6/T5 Gb
Ex tb IIIC T80°C/T95°C Db

110LM/W | IP66 | EMG | Ex

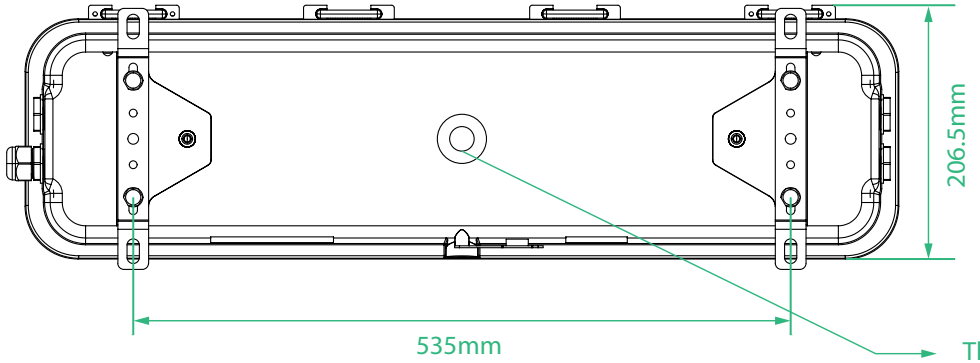

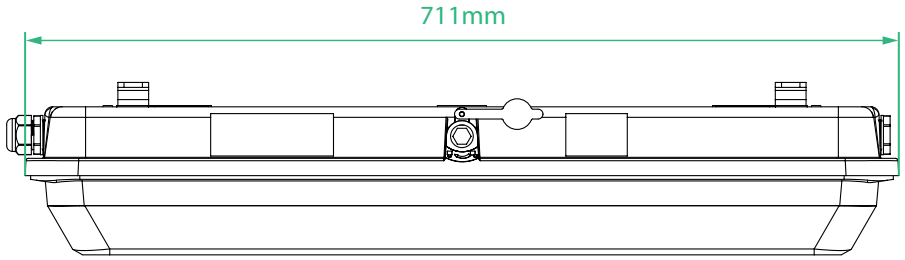




Technical Information

Material:	Glass Fiber Reinforced Plastic (GFRP)
Finish:	White
Hardware:	Marine grade A4 316 stainless steel
Lens:	180°
IK Rating:	IK10
IP Rating:	IP66
Light Source:	30Watt
	110Lumens per Watt
	Natural White 3900K
	CRI > 90
Power Source:	100-277Vac 50~60Hz
	Overload, over-voltage, over-temperature and short circuit protection.
	Potted driver
Ambient Operating Temperature:	-40°C ~ +55°
Cable:	4 x M20 Cable Gland A4 316 stainless steel Ex. Atex certified
Fixture weight:	4 kg



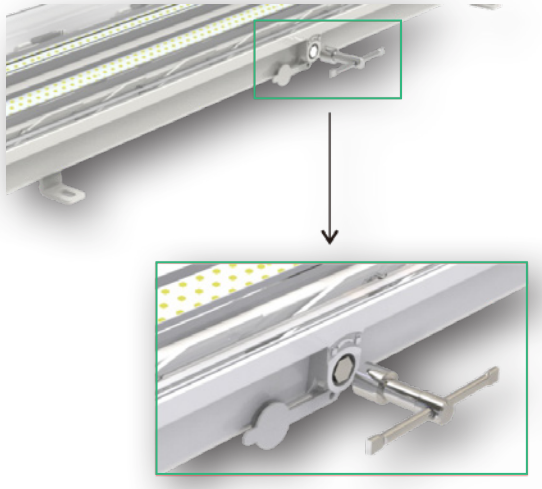

Compliances
ATEX certification / IECEx certification / UL Listing
In compliance with rules of maritime classification societies, additional VDE and IEC 60092-306.
(Equipment luminaires and lighting accessories for use on vessels)

Special Projects
We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended leadtimes will apply. Contact your E-LED Lighting representative with specific inquiries.

Product design and specifications are subject to change without notice. The most current specification sheets can be found at www.E-LEDLighting.com.